


# KAC KEENE COMPRESSOR



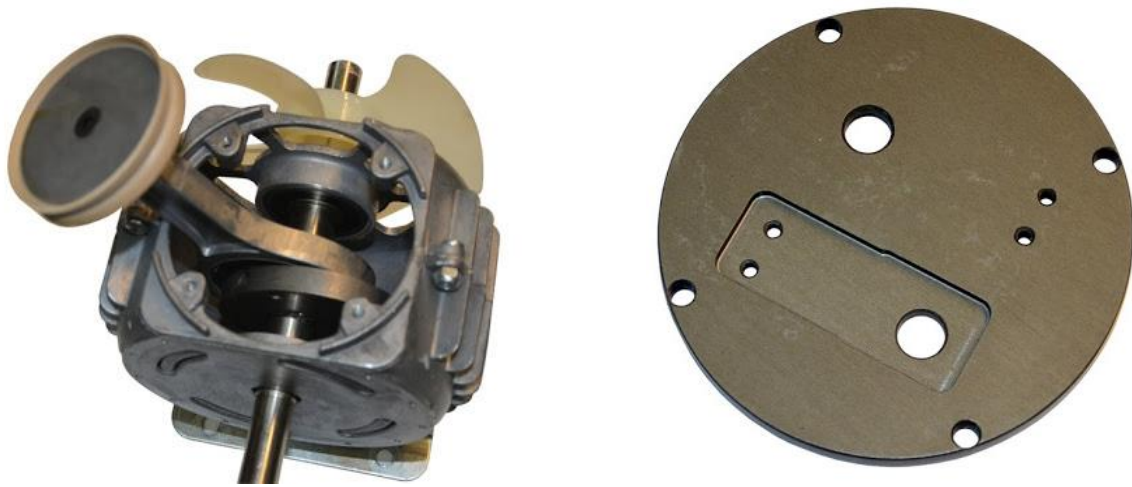

### **Tools needed for service:**

- 4 millimeter Allen wrench to remove head bolt and cup seals
- # 2 Philips head screw driver to remove the fan shroud
- 5/16" or 8mm socket to remove the screws on the bottom of the fan shroud
- Slotted screw driver with a 3/16 " wide tip to change the reed screws
- Some loctite #609 green or #262 red or equivalent to secure the 4mm Allen bolt that holds the cup seals in place and the reed screws

### **KAC Field Service Kit - FSKKAC contains:**

- 3 O-rings
- 2 Cup seals
- 2 Flapper – Valves (Reed plates) incl. 2 screws each
- Allen head bolt (not pictured below)

